



Joint de tige simple effet base polyuréthane Dynathan[®]
Dynathan[®] polyurethane based single acting rod seal





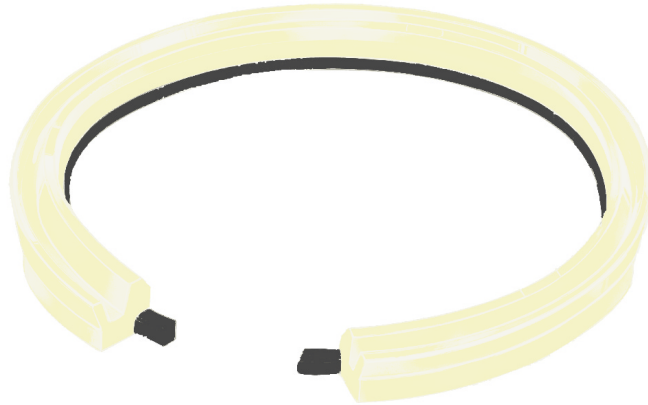

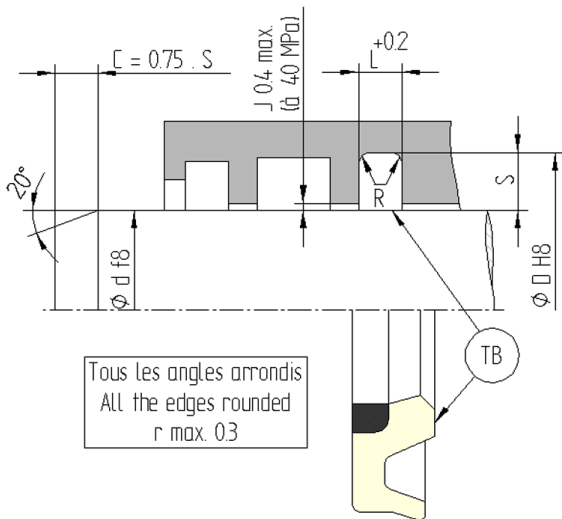






Matière de l'élément dynamique <i>Sealing element material</i>	Dynathan [®] 8330
Matière de la bague anti-extrusion <i>Back up ring material</i>	POM 15202
Pression de service <i>Operating pressure</i>	40 MPa
Vitesse de glissement <i>Sliding speed</i>	0.5 m/s
Température (Huiles HL, HLP) <i>Temperature (HL, HLP oils)</i>	-30 + 110°C



- Joint primaire faible encombrement.
- Pas de surpression possible entre les joints primaires et secondaires.
- Bonne étanchéité sous frottement réduit.
- Résistant à l'usure et à l'extrusion.



- Primary seal easy to install in short housing.
- Design allows for no pressure build-up between primary and secondary seal.
- Good sealing under low friction.
- High abrasion and extrusion resistance.

Rugosité	Surface roughness	R _a	R _t
Surface de glissement	Sliding surface	≤ 0.3 μm	≤ 4 μm
Fond de gorge	Surface of housing	≤ 1.8 μm	≤ 10 μm
Flancs de gorge	Sides of housing	≤ 3.0 μm	≤ 16 μm

	Reference Evco	Ød	ØD	L	R
	TB 40	40	55.5	6.3	1.2
	TB 50	50	65.5	6.3	1.2
	TB 55	55	70.5	6.3	1.2
	TB 56	56	71.5	6.3	1.2
	TB 60	60	75.5	6.3	1.2
	TB 63	63	78.5	6.3	1.2
	TB 65	65	80.5	6.3	1.2
	TB 70	70	85.5	6.3	1.2
	TB 75	75	90.5	6.3	1.2
	TB 80	80	95.5	6.3	1.2
	TB 85	85	100.5	6.3	1.2
	TB 90	90	105.5	6.3	1.2
	TB 95	95	110.5	6.3	1.2
	TB 100	100	115.5	6.3	1.2
	TB 105	105	120.5	6.3	1.2
	TB 110	110	125.5	6.3	1.2
	TB 120	120	135.5	6.3	1.2
	TB 140	140	155.5	6.3	1.2
	TB 150	150	165.5	6.3	1.2
	TB 160	160	175.5	6.3	1.2
	TB 180	180	195.5	6.3	1.2
	TB 200	200	221.0	8.1	2.0

 Dimensions des logements suivant référentiel ISO 7425/2.
 *Groove dimensions according to ISO 7425/2.*

Les dimensions en caractère gras sont tenues en stock.
Large printed dimensions are stocked.